Silicium Steel CURVE





Electric Inertia radiators

High effiency with a touch of distinction

CLIMASTAR

Perfect heating system with indivisualized room temperature management It is the ideal solution for your home

commercial

Climastar Silicium Steel Curve

Manufactured in an exclusive curve shaped steel frame, its core is a patented heat accumulation stone panel that stabilizes the room temperature and reduces consumption. This accumulation panel is called the **DUAL-KHERR**

Steel curve combines three working performance to optimize and restrict the energy consumption: convention for a quick room warming up, a wide radiation angle to increase comfort and heat accumulation in the interior to effectively stabilize the temperature and reduce consumption.

Heat accumulation core inside

DUAL-KHERR

Total Control of your heating needs

- You can esily set up the temperature and working performance in every single room of your home.
- Daily and weekly programming can be done directly on the device.
- It includes the most advanced technology in energy restriction: The Heating Cruise Control system (HCC) based on PID technology and TRIAC interfaces to effectively reduce consumption.
- Open window detector to stop performance when a window or door is open.
- Double insulation, Class II, for extra safety.

Radiation angle up to 130° to increase heat comfort and

reduce consumption



Homogeneous temperature and energy restriction with HCC and TRIAC management







Slim Design, powder coated steel structure

Steel Curve Towel Radiators

Steel curve series are also suitable as towel radiators by adding there specifically designed towel bars.

Two additional stainless steel towel bars area available for vertical models.






Energy Saving

IEC

IECEĘ

Electric Inertia Towel radiator radiators

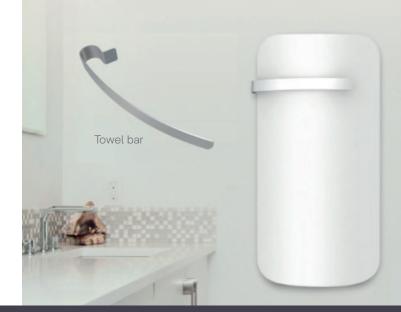


Technical Specifications

E

Voltage			230V / 125V	
Frequency			50Hz / 60Hz	
		68x54	1000 W	
Input		93v54	1500/2000 W (other versions available)	
		45x90	1300 W	
Connecting Plug			Standard UK Plug	
Safety Thermostat			Automatic rearm. Range 0-90 °C	
Electronic room thermostat			Range 5°C - 30°C	
IP Protection			IP24	
Fitting System			Wall fitting with screws and plags (6mm)	
Metal housing finish			Powder coated RAL 9003	
Transport Infor	mation			
Model	Power (W)	Packaging dimensions (cm)	Weight (Kg)	Units per pallet* FTL LTL
68x54	1000	110x65x20	15,5	12 12
93x54	1500 / 2000	110x65x20	17,5	12 12
68x54	1300	55x100x20	15,5	12 12

Dimensions

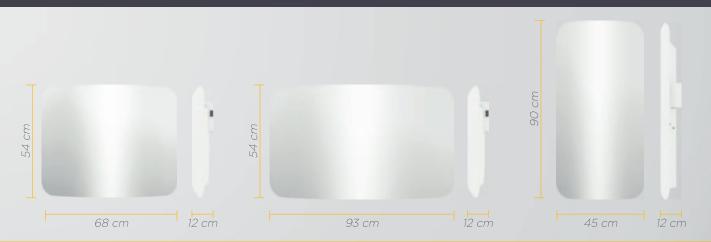

Climastar UK | Unit 15 Oldfield Business Park | Galveston Grove | Fenton | Stoke-on-Trent | Staffordshire | ST4 3PE Telephone: 01782 476 444 Email: info@climastar.co.uk *Trading name of Biow UK Ltd. **www.climastar.co.uk**